

Screwdriving technology

Automation

Air motors

Air tools



Air Polishers

- effective
- high power output - low weight
- ergonomic
- long lifespan

Our polishers are designed to perform best on heavy duty, industrial applications. The robust construction of our tools assures an extended longevity - even when used in 24/7 operations.

Whether a tool is needed for a fine-precision polishing or for the heavy-duty de-rusting of metal, for the removal of paint layers, or even the coarse grinding of cast-iron or wood using fiber disks, the economic, effective, and ergonomic operation of our polishers guarantee a long lifespan.



PA 025-036SX



PLU 50B-45ZK



PLU 180D-80X



PA 070-060BYI



PS 045-034BXT



PLUE 125/150



Pneumatic Polishers for Industrial Applications - Even When Used in 24/7 Operations

Effective

The operating speed of our polishers is coordinated to optimize its operation. Because of the regulated no-load speed, we achieve a particularly low air consumption, which in turn reduces wear and tear. Our DEPRAG INDUSTRIAL polishers work efficiently.

High Power - Low Weight

Our polishers feature an unsurpassed compact design while simultaneously achieving an outstanding performance.

Ergonomic

The balanced, low-vibration polishers are easy to operate and they emit an exceptionally low noise level. The ergonomic grip allows a fatigue-free operation even when used over a long time period.

Long Lifespan

Our polishers are designed to perform best on heavy duty, industrial applications. The robust construction of our tools assures and extended longevity - even when used in 24/7 operations.


Power at Turbine Polisher

Our turbine polisher offers a high power-to-weight ratio, which translates into maximum material removal using only a minimum of effort.



SPECIFICATIONS - POLISHERS - WITH PISTOL-GRIP

Polishers with Pistol-Grip and Speed Regulator



PLU 50A-55ZK
 PLU 50B-45ZK
 PLU 50C-40ZK
 PLU 75A-70ZK

Polisher	Model	PLU 50A-55ZK	PLU 50B-45ZK	PLU 50C-40ZK	PLU 75A-70ZK
Push Button	Part-No.	6060670A	6060671A *)	830499A	830499A
Speed (no load)	min ⁻¹ (rpm)	21 000	17 800	15 000	17 800
Max. power output	kW (hp)	0,45 (.60)	0,45 (.60)	0,45 (.60)	0,45 (.60)
Air consumption (no load)	m ³ /min (cfm)	0,45 (15.9)	0,45 (15.9)	0,45 (15.9)	0,45 (15.9)
Air consumption (load)	m ³ /min (cfm)	0,65 (20.9)	0,65 (20.9)	0,65 (20.9)	0,65 (20.9)
I.D. of air inlet hose	mm (in)	10 (3/8")	10 (3/8")	10 (3/8")	10 (3/8")
Max. Ø of support disc	mm (in)	50 (2")	50 (2")	50 (2")	75 (3")
Max. Ø of grinding tip	mm (in)	35 (1-3/8")	35 (1-3/8")	35 (1-3/8")	-
Max. Ø of grinding insert	mm (in)	9,5 (5/16")	-	-	-
Max. allowable speed of support disc	m/s (ft/s)	55 (180.4)	45 (147.6)	40 (131.2)	70 (229.6)
Max. allowable speed of grinding insert	m/s (ft/s)	45 (147.6)	-	-	-
Spindle thread	mm (in)	M12x1	M12x1	M12x1	M12x1
Weight	kg (lbs)	0,8 (1.65)	0,8 (1.65)	0,8 (1.65)	0,8 (1.65)
Dimensions LxH	mm (in)	160x178 (6x7)	208x178 (8x7)	158x178 (6x7)	160x178 (6x7)
Air connection		G 1/4"	G 1/4"	G 1/4"	G 1/4"

Specifications at 90 psi (6,3 bar)


*) with spindle extension W 1/4" for polishing in heavily open place

Standard Equipment:	Part Number			
Collet Ø 6 mm	827910	-	-	827910
Collet Ø 8 mm	-	830704	-	-
Collet Ø 1/4"	-	-	830653	-
Wrench 12 mm	800403	800403	800403	800403
Wrench 14 mm	800410	800410	-	800410
Wrench 6/9 mm	-	-	830649	-
Spindle extension	-	6013096	-	-
Connector R 1/4" 25 KA	830689	830689	830689	830689

Optional Accessories:	Part Number			
Collet 42 mm	830701	830701	830701	830701
Collet Ø 3 mm	-	-	830650	-
Collet Ø 4mm	-	-	830702	-
Collet Ø 5 mm	-	-	830703	-
Collet Ø 6 mm	-	827910	830648	-
Collet Ø 8 mm	830704	-	-	830704
Collet Ø 9 mm	6014291	6014291	-	6014291
Collet Ø 1/8"	-	-	830651	-
Collet Ø 3/16"	6014287	6014287	830652	6014287
Collet Ø 1/4"	830705	830705	-	830705
Collet Ø 5/16"	830706	830706	-	830706
Spindle	-	-	830709	-

SPECIFICATIONS - ANGLE POLISHERS


Polishers - with Angle Head 90° and with Gear
For Optimal Work-Speeds and the Best Polishing

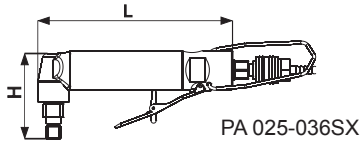

Polisher Lever Valve	Model Part-No.	PA 025-035SX 3149172B	PA 025-021SX 3149172C	PA 025-011SX 3149172D	PA 030-032BX 300146A
Rubber backing pad-Ø	mm (in)	120 (4,72)	120 (4,72)	120 (4,72)	120 (4,72)
Speed (no load)	min ⁻¹ (rpm)	3 600	2 100	1 100	3 200
Max. power output	kW (hp)	0,25 (.34)	0,25 (.34)	0,25 (.34)	0,30 (.40)
Air consumption	m ³ /min (cfm)	0,35 (12.4)	0,35 12.4)	0,35 12.4)	0,41 (14.48)
Weight	kg (lbs)	0,9 (1.98)	0,9 (1.98)	1,0 (2.2)	0,8 (1.76)
Spindle thread		M14	M14	M14	M14
I.D. of air inlet hose	mm (in)	6 (15/64")	6 (15/64")	6 (15/64")	6 (15/64")
Dimensions LxH	mm (in)	189x67 (7.4x2.6)	189x67 (7.4x2.6)	205x67 (8.1x2.6)	258x51 (10.2x2.0)
Air connection		G 1/4"a	G 1/4"a	G 1/4"a	G 1/4"a


Specifications at 90 psi (6,3 bar)

Standard Equipment:	Part Number			
Quick connect coupler	804251	804251	804251	804251
Plug	323214	323214	323214	323214
Wrench 14 mm	800410	800410	800410	-
Wrench 15 mm	-	-	-	800409


Optional Accessories:	Part Number
Rubber backing pad (with flange nut 805187), Ø 120 mm 	6075042
Wrench	805080
Pressure hose (2m), exhaust hose(0,75 m)	313179A

SPECIFICATIONS - ANGLE POLISERS


Angle Polishers - with Speed Regulator

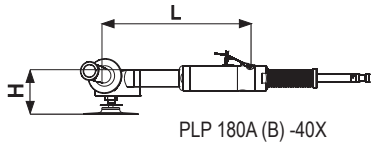

PLP 180A (B) -40X



PA 070-060BYI



PAT 260-085BX

Polisher Design:
 - with extension spindle (design A)
 - without extension spindle (design B)

- Double Insulated Housing

- Turbine Polisher - turbine motor does not require airline lubrication

				Turbine Polisher *)	
Polisher Safety Lever	Model Part-No.	PLP 180A-40X 6060663A	PLP 180B-40X 826716 A	-	PAT 220-085BX 310115A
Polisher Twist Valver	Model Part-No.	-	-	PA 070-060BYI 6061047A	-
Speed (no load)	min ⁻¹ (rpm)	4 000	4 000	6 000	8 500
Max. power output	kW (hp)	0,70 (.94)	0,70 (.94)	0,70 (.94)	2,2 (2.95)
Air consumption (no load)	m ³ /min (cfm)	0,45 (15.9)	0,45 (15.9)	0,60 (15.9)	0,7 (24.72)
Air consumption (load)	m ³ /min (cfm)	0,85 (30.0)	0,85 (30.0)	0,75 (26.48)	1,8 (63.6)
I.D. of air inlet hose	mm (in)	10 (3/8")	10 (3/8")	10 (3/8")	13 (1/2")
Max. Ø of vulcan fiber disc	mm (in)	180 (7")	180 (7")	180 (7")	180 (7")
Max. Ø of support disc	mm (in)	-	-	-	180 (7")
Max. allowable speed	m/s (ft/s)	40	40	80	80
Weight	kg (lbs)	2,4 (5.28)	2,2 (4.8)	2,0 (4.4)	2,0 (4.4)
Length of supply/exhaust hose	m	2/1	2/1	2/1	-
Dimensions LxH	mm (in)	330x78 (13.0x3.1)	238x78 (9.4x3.1)	330x78 (13.0x3.1)	295x93 (11.6x3.7)
Spindle thread		-	-	-	M14
Air connection		Nipple	Nipple	Nipple	G 1/2"

Specifications at 90 psi (6,3 bar)



*) Turbine Polisher - Advantages:

- Oil-free and maintenance-free operation; exchange of vane is not needed. Turbine motor does not require airline lubrication.
- High material removal rate reduces operational duration at increased productivity
- Optimal power to weight ration, low air consumption
- Perfect handling by means of an anti-vibration side handle and ergonomic shape, change-over to left-hander operation possible.
- High operating safety - machine automatically shuts-off at overload, safety lever, integrated contact-protection that avoids an inadvertent contact of the grinding disk by the operator and eliminates any subsequent injury

Standard Equipment:

	Part Number			
Wrench	828832	828832	828832	-
Rubber backing pad Ø 180 mm	830699	830699	830699	830699


Optional Accessories:

	Part Number
Rubber backing pad (with flange nut), Ø 180 mm	830699




SPECIFICATIONS - ANGLE POLISHERS


Angle Polishers - with Speed Regulator



PLU 115A-80Z



PLU 180D-80X



PLU 180E-80X

Polisher	Model	PLU 115A-80Z		-		-	
Trigger Start	Part-No.	826313A					
Polisher	Model	-		PLU 180D-80X		PLU 180E-80X	
Safety Lever (Lever - up/down)	Part-No.			826314A		830499C	
Speed (no load)	min ⁻¹ (cfm)	13	200	8	500	8	500
Max. power output	kW (hp)	0,46	(.62)	1,20	(1.61)	1,20	(1.61)
Air consumption (no load)	m ³ /min (cfm)	0,42	(14.8)	0,70	(24.7)	0,70	(24.7)
Air consumption (load)	m ³ /min (cfm)	0,80	(28.3)	1,50	(53.0)	1,50	(53.0)
I.D. of air inlet hose	mm (in)	10	(3/8")	13	(1/2")	13	(1/2")
Max. Ø of vulcan fiber disc	mm (in)	115	(4-1/2")	180	(7")	180	(7")
Max. allowable speed	m/s (ft/s)	80		80		80	
Weight	kg (lbs)	1,4	(2.9)	3,1	(6.8)	2,7	(5.94)
Length of supply / exhaust hose	m	2/1		-		-	
Dimensions LxH	mm (in)	238x150	(9.4x5.9)	434x120	(17.1x5.2)	425x125	(16.7x4.9)
Air connection		Nipple		Nozzle		G 1/2"	

Specifications at 90 psi (6,3 bar)

Standard Equipment:	Part Number		
Wrench	828832	828832	828832
Socket (hex) 5 mm	800448	-	-
Socket (hex) 6 mm	800449	800449	800449
Support disc Ø 115 mm	827713	-	-
Support disc Ø 180 mm	-	830699	830699
Chuck	830700	-	-
Fibre disc Ø 115 mm	830698	-	-

Optional Accessories:	Part Number		
Rear flange	-	-	830710
Flange	-	-	830711
Grinding wheel Ø 180 mm	-	-	830707 *)

*) A rubber support disk can only be used in combination with the appropriate flange - Part No. 830710 and tension nut Part No. 830711; the flange and nut must be ordered separately. Rubber support disks can easily be exchanged using the supplied socket - Part No. 800449 and the pin wrench - Part No. 828832.



Rubber support disk Ø 180 mm
(with flange nut),
Part No. 830699

Necessary for the exchange:
Socket 6 mm (Part No. 800449)
and pin wrench (Part No.
828832).




Rubber support disk Ø 180 mm
Part No. 830707

Necessary for the exchange:
Socket 6 mm (Part No. 800449)
or pin wrench (Part No. 828832).

SPECIFICATIONS- EXCENTRIC POLISHERS

Excentric Polishers - with Speed Regulator. Specially for Precision and Demanding Polishing in the Automotive Industry. This Polisher is Intended for the Use with Emery Wheels (with Velcro), Fabric Wheels and Polishing Wheels.



PLUE 125/150

Polisher	Model	PLUE 125/150	
Lever Valve	Part-No.	828312A	
Speed (no load)	min ⁻¹ (rpm)	12 000	
Max. power output	kW (hp)	0,15	(.20)
Air consumption (no load)	m ³ /min (cfm)	0,25	(8.8)
Air consumption (load)	m ³ /min (cfm)	0,25	(8.8)
I.D. of air inlet hose	mm (in)	10	(3/8")
Max. Ø of emery wheel	mm (in)	125/150	(5"/6")
Max. allowable speed	m/s (ft/s)	80	
Thread of work spindle	mm (in)	5/16"-24	
Weight	kg (lbs)	0,87	(1.9)
Dimensions Ø dxLxH	mm (in)	Ø 150x215x105	(Ø 8.9x8.5x4.1)
Air connection		G 1/4"	


Specifications at 90 psi (6,3 bar)

Standard Equipment:	Part Number
Support disc Ø 125 mm	830629
Support disc Ø 150 mm	6075107
Connector R 1/4" 25 KA	830689
Wrench 17 mm	800405
Hose clamp	830690

Optional Accessories:	Part Number
Suction kit	830691
Quick-connect coupling 3/8" 25KA	830692

SPECIFICATIONS - STRAIGHT POLISHER

Straight Polisher - with Speed Regulator. This Polisher is Designed for Processing of Various Material by Polish Wheel, the Wheels are Screwed Directly to the Spindle with Thread 5/8"-11 UNF.

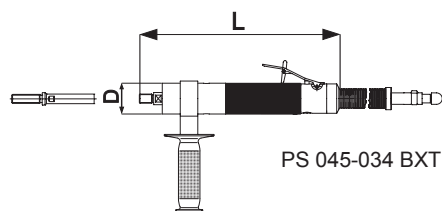

Polisher	Model	PS 045-034 BXT	
Safety Lever	Part-No.	6060684A	
Speed (no load)	min ⁻¹ (rpm)	3 400	
Max. power output	kW (hp)	0,45	(.6)
Air consumption (no load)	m ³ /min (cfm)	0,40	(14.1)
Air consumption (load)	m ³ /min (cfm)	0,60	(21.2)
I.D. of air inlet hose	mm (mm)	10	(3/8")
Weight	kg (lbs)	1,5	(3.3)
Dimensions Ø DxL	mm (in)	Ø 43x405	(1.7x15.9)
Air connection		Nipple	

Specifications at 90 psi (6,3 bar)

Standard Equipment:	Part Number
Wrench 14 mm	800410
Spindle	6013230

DEPRAG

DEPRAG CZ a.s., Lázně Bělohrad

DEPRAG CZ a.s., T. G. Masaryka 113, 507 81 Lázně Bělohrad - Czech Republic

Tel.: +420-493 771 511, Fax: +420-493 771 623, E-mail: sales@deprag.cz, Internet: www.deprag.cz